

YUSTA

SHANDONG YUSTA TIRE CO. LTD.
QINGDAO, SHANDONG, CHINA
www.yustatire.com



YUSTA

Product Information

YUSTAPRODUCT

ALL-TERRAIN



MUD-TERRAIN



YM-3



YST-718



YST-1158



YST-1168



YST-1198



ABOUT US

Shandong Yusta Tire Co., Ltd. founded in 2017, which is located in China's tire capital-Shandong Guangrao, is one of the key government support enterprises integrating R&D, manufacturing and sales of high-tech tire products.

The company's products have passed the "CCC" certificate for China Compulsory Product Certification, the United States DOT certification, Europe EMARK certification, etc.

The ingenious technical team has a high professional level in tire structure design, quality control, process management and other aspects.

A pioneering sales team, adhering to the "strength for survival, credibility for development" concept, focus on domestic and foreign market development and deep excavation of channels.

Ingenuity and demanding detail and service make the company excellent market reputation.

Following the founding conception of "Quality tire, leading the future", the company concerns "Quality-oriented, Customer demand-guided". The company takes the path of sustainable development combining quality and efficiency, Leading the off-road tire industry in all directions.



ALL-TERRAIN A/T



- Widened and deepened pattern groove design.
- Enhance tire dry wetland grip.
- Improve tire drainage and mud discharge ability.



- Sidewall reinforced decoration design.
- Super cool appearance, convex white lettering design.



- Thickened undershoulder improves impact resistance and side puncture ability.
- Sidewall rim protection design effectively prevent rim and sidewall damage.



■ All-terrain pattern design

Specially designed for all terrain.
Perfect combination of speed stability and off-road traction.



■ Pattern bottom bullet stone design

Pattern bottom bullet stone design.
Shoulder pattern bottom elastic drainage stone.



■ Special tread rubber formula design

Special formula materials are used.
Excellent cutting resistance.
Improve tire service life.



SIZE	LI/SS	PR	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG) SINGLE	MAX.LOAD(KG) DUAL	MAX.PRESSURE KPA	MAX.PRESSURE P.S.I	STANDARD RIM(J)
15 205/70R15LT	102/99Q	8PR	208	669	850	775	450	65	6
15 235/70R15LT	102/99Q	6PR	240	711	850	775	250	50	7
15 245/70R15LT	105/102Q	6PR	248	725	925	850	350	50	7
15 265/70R15LT	109/105Q	6PR	272	753	1030	925	350	50	8
15 215/75R15LT	100/97Q	6PR	216	703	800	730	350	50	6
15 225/75R15LT	102/99Q	6PR	223	719	850	775	350	50	6
15 235/75R15LT	104/101Q	6PR	235	733	900	825	350	50	6 1/2
15 245/75R15LT	117/103Q	6PR	248	749	1120	1000	350	50	7
15 30*9.50R15LT	104Q	6PR	240	750	900	/	350	50	7 1/2
15 31*10.50R15LT	109Q	6PR	268	775	1030	/	350	50	8 1/2
15 33*12.50R15LT	108Q	6PR	318	826	1000	/	350	50	10
16 215/65R16LT	109/105Q	10PR	221	686	1030	925	550	80	6 1/2
16 235/65R16C	115/113Q	8PR	240	712	1215	1150	450	65	7
16 255/65R16LT	113/109Q	8PR	260	738	1150	1030	450	65	7 1/2
16 215/70R16LT	100/97Q	6PR	221	708	800	730	350	50	6 1/2
16 225/70R16LT	102/99Q	6PR	228	722	850	775	350	50	6 1/2
16 235/70R16LT	110/107Q	8PR	240	736	900	825	350	50	7
16 245/70R16LT	113/110Q	8PR	248	750	1150	1060	450	65	7
16 255/70R16LT	115/112Q	8PR	260	764	1215	1120	450	65	7 1/2
16 265/70R16LT	110/107Q	6PR	272	778	1060	975	350	50	8
16 265/70R16LT	121/118Q	10PR	272	778	1450	1320	550	80	8
16 275/70R16LT	119/116Q	8PR	279	792	1360	1250	450	80	8
16 285/70R16LT	125/122Q	10PR	292	806	1650	1500	550	80	8 1/2
16 305/70R16LT	118/115Q	8PR	311	834	1320	1215	350	65	9
16 215/75R16LT	101/98Q	6PR	216	728	825	750	350	50	6

SIZE	LI/SS	PR	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG) SINGLE	MAX.LOAD(KG) DUAL	MAX.PRESSURE KPA	MAX.PRESSURE P.S.I	STANDARD RIM(J)
16 225/75R16LT	115/112Q	10PR	223	744	1215	1120	550	80	6
16 235/75R16LT	117/114Q	10PR	235	758	1285	1180	550	80	6 1/2
16 245/75R16LT	120/116Q	10PR	248	774	1400	1250	550	80	7
16 265/75R16LT	123/120Q	10PR	267	804	1550	1400	550	80	7 1/2
16 285/75R16LT	126/123Q	10PR	286	834	1700	1550	550	80	8
16 305/75R16LT	125/122Q	10PR	306	864	1650	1500	450	65	8 1/2
16 315/75R16LT	127/124Q	10PR	313	878	1750	1600	450	65	8 1/2
16 215/85R16LT	115/112Q	10PR	216	772	1215	1120	550	80	6
16 235/85R16LT	120/116Q	10PR	235	806	1400	1250	550	80	6 1/2
17 215/60R17LT	100/96Q	8PR	221	690	800	710	450	65	6 1/2
17 225/60R17LT	103/99Q	6PR	228	702	875	775	350	50	6 1/2
17 235/60R17LT	112/109Q	10PR	240	714	1120	1030	550	80	7
17 255/60R17LT	110/106Q	8PR	260	738	1060	950	450	65	7 1/2
17 225/65R17LT	107/103Q	8PR	228	724	975	875	450	65	6 1/2
17 235/65R17LT	109/105Q	8PR	240	738	1030	925	450	65	7
17 245/65R17LT	105/102Q	6PR	248	750	925	850	350	50	7
17 255/65R17LT	114/110Q	8PR	260	764	1180	1060	450	65	7 1/2
17 265/65R17LT	120/117Q	10PR	272	776	1400	1285	550	80	8
17 275/65R17LT	121/118Q	10PR	279	790	1450	1320	550	80	8
17 285/65R17LT	121/118Q	10PR	292	802	1450	1320	550	80	8 1/2
17 235/70R17LT	112/109Q	8PR	240	762	1120	1030	450	65	7
17 245/70R17LT	119/116Q	10PR	248	776	1360	1250	550	80	7
17 265/70R17LT	121/118Q	10PR	272	804	1450	1320	550	80	8
17 275/70R17LT	121/118Q	10PR	279	818	1450	1320	550	80	8
17 285/70R17LT	121/118Q	10PR	292	832	1450	1320	550	80	8 1/2
17 295/70R17LT	121/118Q	10PR	299	846	1450	1320	550	80	8 1/2
17 305/70R17LT	121/118Q	10PR	311	860	1450	1320	450	65	9
17 315/70R17LT	121/118Q	10PR	323	874	1450	1320	450	65	9 1/2
17 245/75R17LT	121/118Q	10PR	248	800	1450	1320	550	80	7
17 255/75R17LT	111/108Q	6PR	255	814	1090	1000	350	50	7
17 275/75R17LT	121/118Q	8PR	275	844	1450	1320	450	65	7 1/2
17 285/75R17LT	121/118Q	10PR	286	860	1450	1320	550	80	8
17 33*12.50R17LT	120Q	10PR	318	826	1400	/	450	65	10
17 35*12.50R17LT	125Q	10PR	318	877	1650	/	450	65	10
17 37*13.50R17LT	121Q	10PR	345	928	1450	/	450	65	11
18 235/50R18LT	101/97Q	6PR	245	693	825	730	350	50	7
18 215/55R18LT	99/95Q	8PR	226	693	775	690	450	65	7
18 225/55R18LT	102/98Q	6PR	233	705	850	750	350	50	7
18 235/55R18LT	104/100Q	6PR	245	715	900	800	350	65	7 1/2
18 255/55R18LT	109/105Q	8PR	265	737	1030	925	450	65	8
18 225/60R18LT	104/100Q	8PR	228	727	900	800	450	65	6 1/2
18 235/60R18LT	107/103Q	8PR	240	739	975	875	450	65	7
18 245/60R18LT	112/109Q	8PR	248	751	1120	1030	450	65	7
18 255/60R18LT	116/113Q	8PR	260	763	1250	1150	450	65	7 1/2
18 265/60R18LT	119/116Q	10PR	272	775	1360	1250	550	80	8
18 275/60R18LT	121/118Q	10PR	279	787	1450	1320	550	80	8
18 285/60R18LT	122/119Q	10PR	292	799	1500	1360	550	80	8 1/2
18 325/60R18LT	124/121Q	10PR	331	847	1600	1450	450	65	9 1/2
18 235/65R18LT	113/110Q	8PR	240	763	1150	1060	450	65	7
18 265/65R18LT	122/119Q	10PR	272	801	1500	1360	550	80	8
18 275/65R18LT	123/120Q	10PR	279	815	1550	1400	550	80	8

SIZE	LI/SS	PR	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG)		MAX.PRESSURE		STANDARD RIM(J)
18 285/65R18LT	125/122Q	10PR	292	827	1650	1500	550	80	8 1/2
18 305/65R18LT	124/121Q	10PR	311	853	1600	1450	450	65	9
18 325/65R18LT	127/124Q	10PR	331	879	1750	1600	450	65	9 1/2
18 255/70R18LT	117/114Q	8PR	260	815	1285	1180	450	65	7 1/2
18 265/70R18LT	124/121Q	10PR	272	829	1600	1450	550	80	8
18 275/70R18LT	125/122Q	10PR	279	843	1650	1500	550	80	8
18 33*12.50R18LT	118Q	10PR	318	826	1320	/	450	65	10
18 35*12.50R18LT	118Q	8PR	318	877	1550	/	450	65	10
18 37*12.50R18LT	123Q	8PR	318	928	1550	/	350	50	10
19 255/50R19LT	107/103Q	8PR	265	739	975	875	450	65	8
19 265/50R19LT	110/106Q	8PR	277	749	1060	950	450	65	8 1/2
19 225/55R19LT	103/99Q	8PR	233	731	875	775	450	65	7
19 235/55R19LT	105/101Q	8PR	245	741	925	825	450	65	7 1/2
19 245/55R19LT	110/107Q	8PR	253	753	1060	975	450	65	7 1/2
19 255/55R19LT	111/108Q	8PR	265	763	1090	1000	450	65	8
19 265/55R19LT	113/110Q	8PR	277	775	1150	1060	450	65	8 1/2
19 275/55R19LT	114/110Q	8PR	284	785	1180	1060	450	65	8 1/2
19 235/60R19LT	108/105Q	8PR	240	764	1000	925	450	65	7
19 255/60R19LT	117/114Q	8PR	260	789	1285	1180	450	65	7 1/2
19 235/65R19LT	110/107Q	8PR	240	789	1060	975	450	65	7
19 255/65R19LT	116/112Q	8PR	260	815	1250	1120	450	65	7 1/2
20 275/45R20LT	109/105Q	8PR	273	756	1030	925	450	65	9
20 245/50R20LT	105/102Q	8PR	253	754	925	850	450	65	8
20 255/50R20LT	112/109Q	8PR	265	764	1120	1030	450	65	8
20 265/50R20LT	114/110Q	8PR	277	774	1180	1060	450	65	8 1/2
20 275/50R20LT	116/113Q	10PR	284	784	1250	1150	550	80	8 1/2
20 285/50R20LT	119/116Q	8PR	297	794	1360	1250	550	80	9
20 235/55R20LT	105/102Q	8PR	245	766	925/2040	850/1875	450	65	7 1/2
20 255/55R20LT	110/107Q	8PR	265	788	1150	1060	450	65	8
20 265/55R20LT	113/109Q	8PR	277	800	1150	1030	450	65	8
20 275/55R20LT	115/112Q	8PR	284	810	1400	1285	550	80	8 1/2
20 285/55R20LT	117/114Q	8PR	297	822	1285	1180	450	65	9
20 305/55R20LT	121/118Q	10PR	316	844	1450	1320	450	65	9 1/2
20 255/60R20LT	118/115Q	8PR	260	814	1320	1215	450	65	7 1/2
20 275/60R20LT	123/120Q	10PR	279	838	1550	1400	550	80	8
20 285/60R20LT	125/122Q	10PR	292	850	1650	1500	550	80	8 1/2
20 33*12.50R20LT	114Q	10PR	318	832	1180	/	450	65	10
20 35*12.50R20LT	121Q	10PR	318	877	1450	/	450	65	10
21 255/45R21LT	105/102Q	8PR	255	763	925	850	450	65	8 1/2
21 265/45R21LT	108/104Q	8PR	266	771	1000	900	450	65	9
21 275/45R21LT	110/107Q	8PR	273	781	1060	975	450	65	9
21 285/45R21LT	113/109Q	8PR	285	789	1150	1030	450	65	9 1/2
21 275/50R21LT	117/114Q	8PR	284	809	1320	1215	450	65	8 1/2
22 265/40R22LT	109/106Q	8PR	271	771	1030	950	450	65	9 1/2
22 275/40R22LT	107/104Q	8PR	278	779	975	900	450	65	9 1/2
22 295/40R22LT	112/118Q	8PR	301	795	1120	1000	450	65	10 1/2
22 305/40R22LT	115/112Q	8PR	313	803	1180	1060	450	65	11
22 275/45R22LT	112/108Q	8PR	273	807	1120	1000	450	65	9
22 285/45R22LT	117/114Q	8PR	285	815	1285	1180	450	65	9 1/2
22 265/50R22LT	112/109Q	8PR	277	825	1120	1030	450	65	8 1/2
22 275/50R22LT	115/111Q	8PR	284	835	1215	1090	450	65	8 1/2
22 285/50R22LT	121/118Q	10PR	297	845	1450	1320	550	80	9
22 33*12.50R22LT	109Q	10PR	318	826	1030	/	450	65	10



MUD-TERRAIN M/T



Tread bionic "dagger" pattern block design. Better embedded with complex off-road surface. Improve grip ability on complicated road conditions.

Widened and deepened pattern groove design. Favorable heat dissipation, excellent self-cleaning performance and strong grip, suitable for all kinds of complex road conditions.

Shoulder pattern adopts the groove design of silt self-purification technology and stone exclusion technology. Automatically removes the silt accumulated in the groove as it rotates. Effectively prevent stone embedding, so as to ensure safe and smooth driving.

Sidewall bionic decorative design. Thickened sidewall with bionic personality, not only improves the impact resistance of the tire, but also meet the individual needs of consumers.

▪ Tread bionic "dagger" pattern block design

Better embedded with complex off-road surface. Improve grip ability on complicated road conditions.



▪ Sidewall bionic decorative design

Thickened sidewall with bionic personality, not only improves the impact resistance of the tire, but also meet the individual needs of consumers.




▪ Widened and deepened pattern groove design

Favorable heat dissipation, excellent self-cleaning performance and strong grip, suitable for all kinds of complex road conditions.



SIZE	LI/SS	PR	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG) SINGLE	DUAL	MAX.PRESSURE KPA	P.S.I	STANDARD RIM(J)
37*12.50R16.5LT	134N	10PR	318	928	2120	/	450	65	8.25
37*12.50R17LT	124Q	8PR	318	928	1600	/	350	50	10

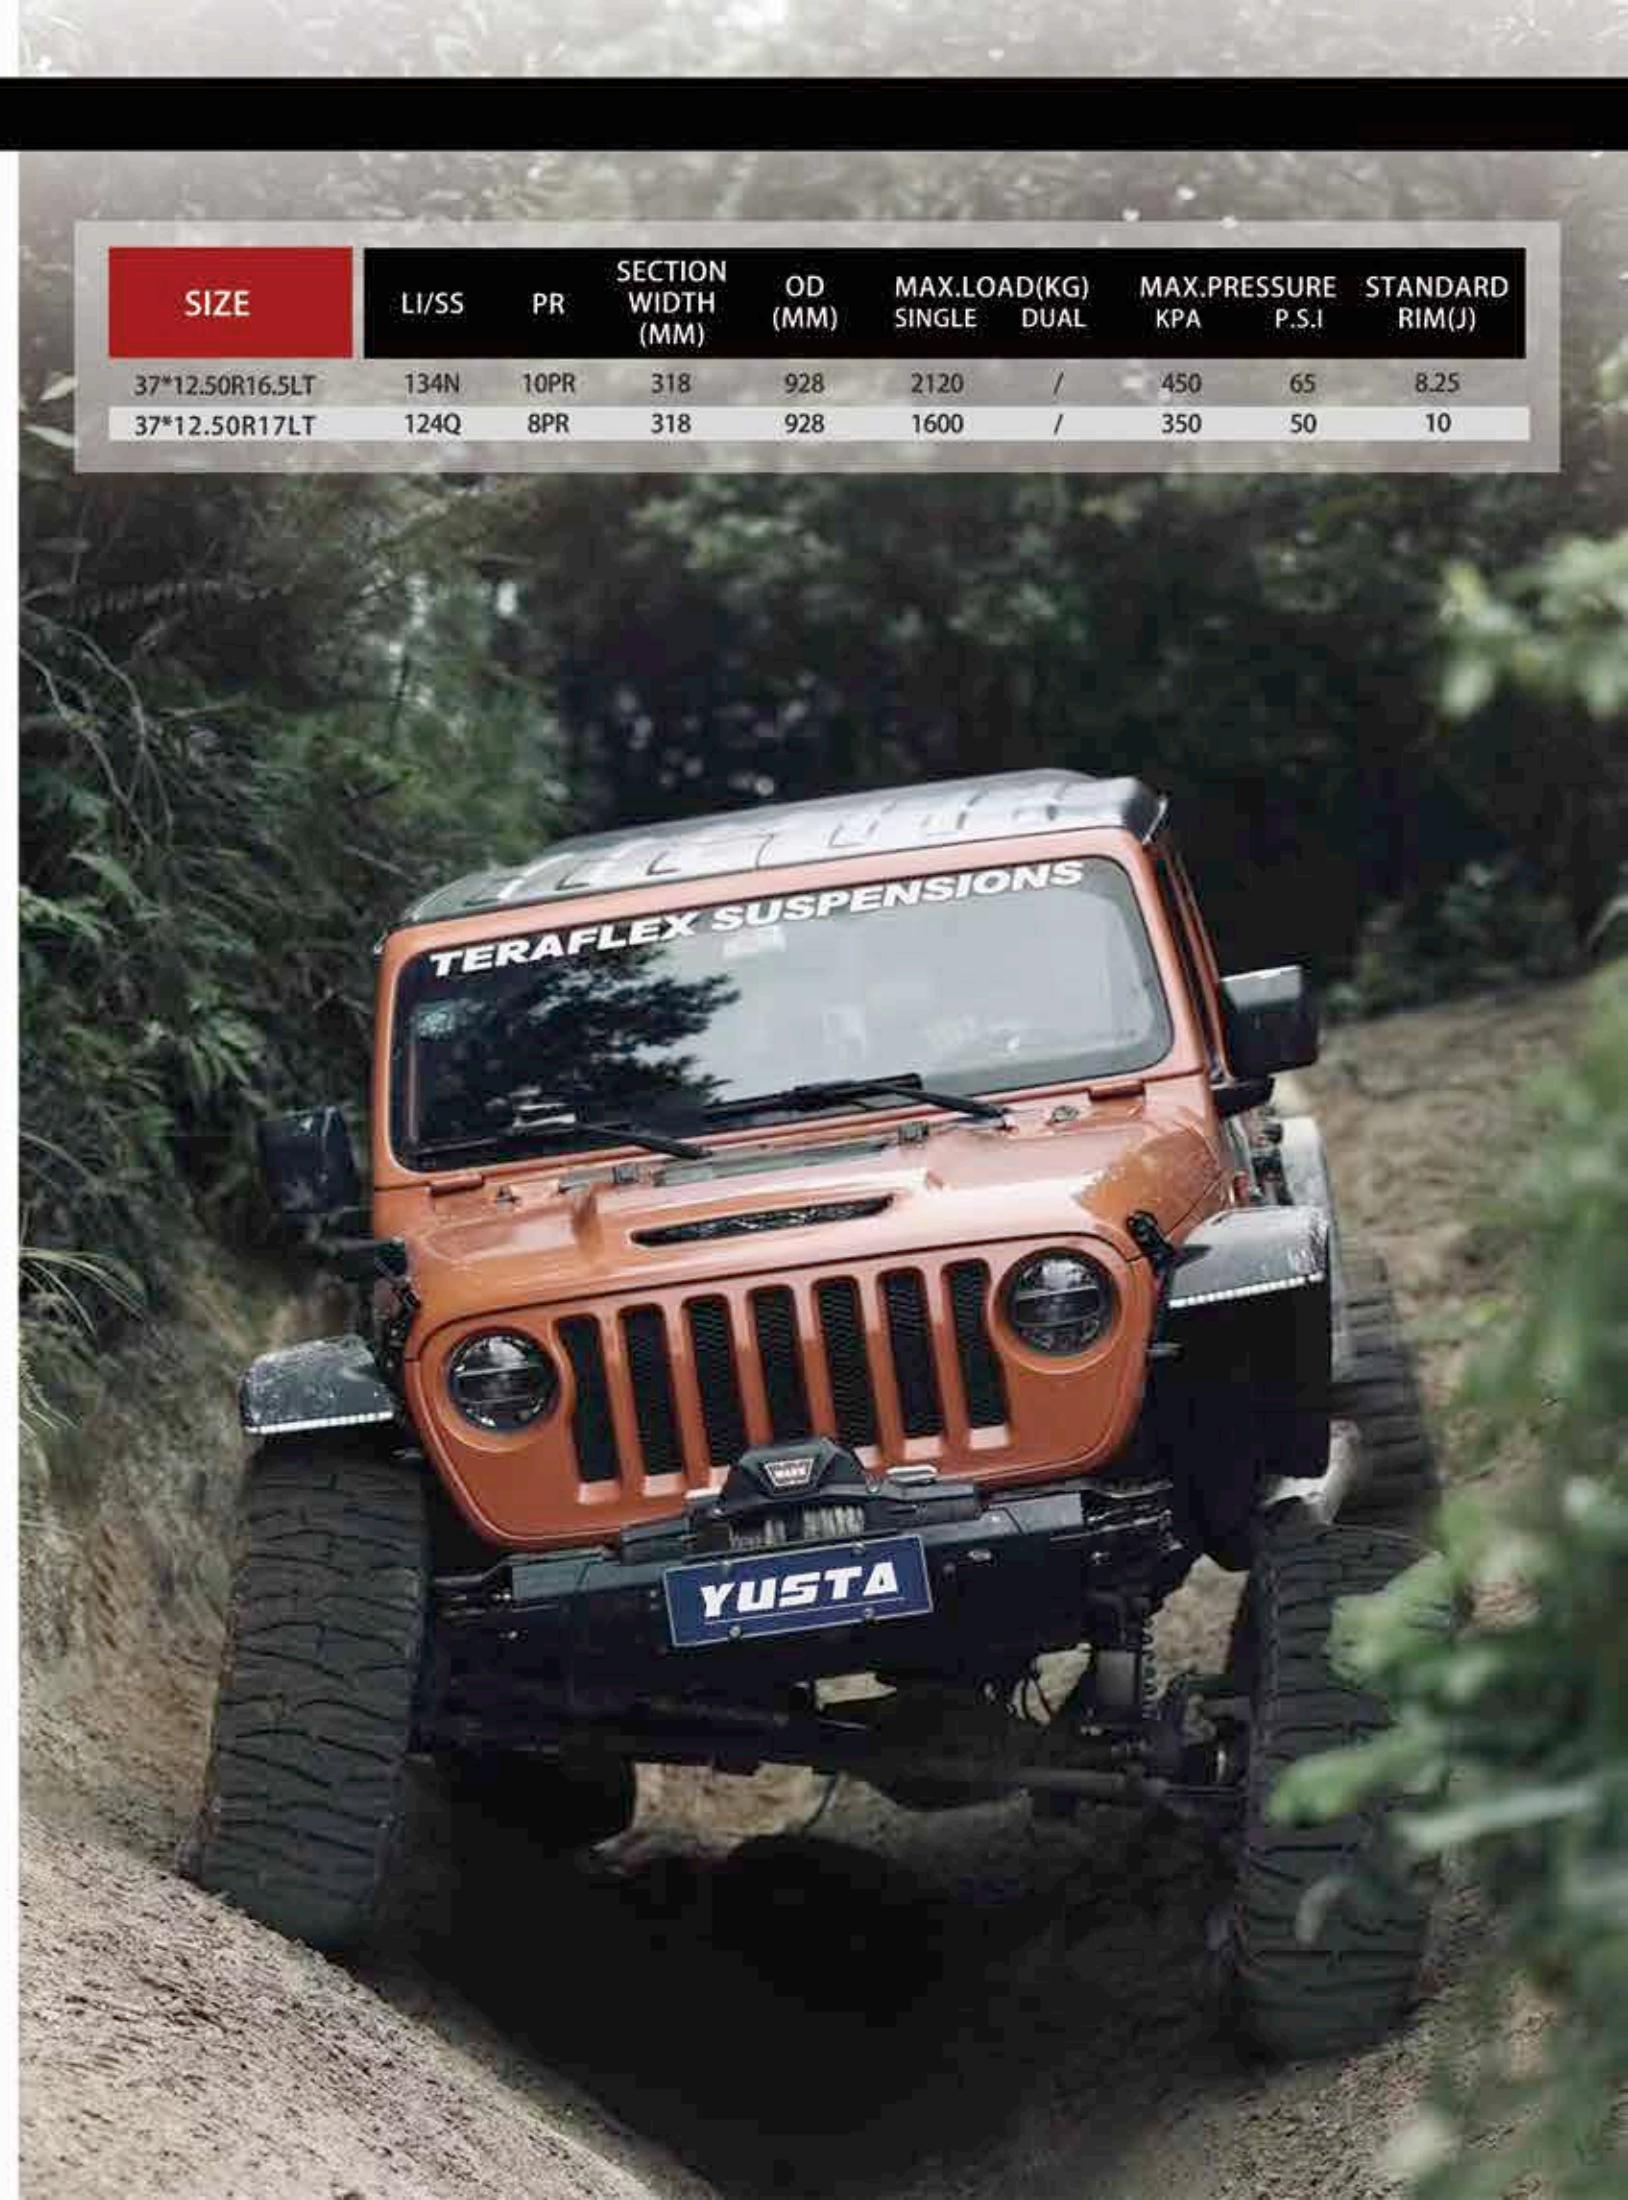



YUSTA



YUSTA



YST-1168

Pattern Design:

- ◆ Asymmetrical non-directional pattern design provides peace of mind in all weather conditions.
- ◆ Continuous large pattern blocks on the outside shoulder enhance ground traction.
- ◆ The grooves on the inner shoulder are designed to provide efficient drainage and superior wetland performance, which can proceed cross tire transposition to help reduce off-wear and make wear more uniform.
- ◆ These features ensure silence, comfort and long service life of the tire.



Braking Performance



Off-road Performance



Wetland Performance



Durable wear

SIZE	LI/SS	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG) SINGLE DUAL	MAX.PRESSURE KPA P.S.I	STANDARD RIM(J)
235/40ZR18	95WXL	241	645	690 1521	340 49	8.5
245/40ZR18	97WXL	248	653	730 1609	340 49	8.5
265/40ZR18	101WXL	271	669	825 1819	340 49	9.5
275/40ZR18	103WXL	278	677	875 1929	340 49	9.5
235/45ZR18	98WXL	236	669	750 1653	340 49	8.0
245/45ZR18	100WXL	243	677	800 1764	340 49	8.0
255/45ZR18	103WXL	255	687	875 1929	340 49	8.5
255/50ZR18	106WXL	265	713	950 2094	340 49	8.0
255/55R18	109VXL	265	737	1030 2271	340 49	8.0
265/60R18	114HXL	272	775	1180 2601	340 49	8.0
265/50R20	111VXL	277	774	1090 2403	340 49	8.5

YST-1158

Pattern Design:

- ◆ All season high performance tyres with excellent handling and traction.
- ◆ Without sacrificing running wear and tear.
- ◆ Tread pattern has wide groove, seam provides good all-season performance.
- ◆ Computer optimized tread pattern ensures smooth and quiet driving.
- ◆ Outline white letters rare size customized.



Braking Performance



Off-road Performance



Wetland Performance



Durable wear

SIZE	LI/SS	SECTION WIDTH (MM)	OD (MM)	MAX.LOAD(KG) KG 1b5	MAX.PRESSURE KPA P.S.I	STANDARD RIM(J)
265/50R15	99S	277	570	775 1705	300 44	8 1/2





YUSTA

YST-1198

Pattern Design:

- ◆ Asymmetric pattern with large pattern blocks on the outer side. effectively restrain the tire deformation during vehicle turning or braking, provide more powerful support when turning, and provide better dry ground handling and braking performance.
- ◆ Optimizing the design of variable pitch arrangement. by optimizing the tread pattern pitch design through computer simulation, the noise generated by the contact between tire pattern blocks and the ground is effectively reduced.
- ◆ Four longitudinal main ditch design. wide groove design enhances tire drainage performance and effectively avoids tire slippage on wet and slippery roads.
- ◆ The latest solution polymerized butadiene styrene new silicon containing tread formula design. tighter tire contact, effectively improving wetland performance, reducing rolling resistance, and providing excellent handling performance.



SIZE	LOAD INDEX	SPEED SYMBOL	SECTION WIDTH (mm)	OD (mm)	MAX.LOAD(KG)	MAX.PRESSURE(KPA)
205/50ZR17	93XL	Y	214	638	580/650	250/290
205/55ZR17	95XL	W	214	658	615/690	250/290
215/40ZR17	87XL	Y	218	604	487/545	250/290
215/45ZR17	91XL	Y	213	626	545/615	250/290
215/50ZR17	95XL	W	226	648	615/690	250/290
215/55ZR17	94	W	226	668	670/750	250/290
225/45ZR17	94XL	Y	225	634	615/670	250/290
225/50ZR17	98XL	Y	233	658	670/750	250/290
225/55ZR17	97	W	233	680	730/825	250/290
235/45ZR17	97XL	Y	236	644	670/730	250/290
235/50ZR17	100XL	W	245	668	710/800	250/290
235/55ZR17	103XL	W	245	690	775/875	250/290
245/45ZR17	99XL	Y	243	652	690/775	250/290
255/45ZR17	102XL	Y	255	662	750/850	250/290
215/50ZR18	96XL	Y	226	673	630/710	250/290
215/55ZR18	99XL	W	226	693	690/775	250/290
225/40ZR18	92XL	Y	230	637	560/630	250/290
225/45ZR18	95XL	Y	225	659	615/690	250/290
225/50ZR18	99XL	W	233	683	690/775	250/290
225/55ZR18	98	W	233	705	750/850	250/290
235/40ZR18	95XL	Y	241	645	615/690	250/290
235/45ZR18	98XL	Y	236	669	670/750	250/290
235/50ZR18	101XL	Y	245	693	730/825	250/290

SIZE	LOAD INDEX	SPEED SYMBOL	SECTION WIDTH (mm)	OD (mm)	MAX.LOAD(KG)	MAX.PRESSURE(KPA)
235/55ZR18	104XL	W	245	715	800/900	250/290
245/40ZR18	97XL	Y	248	653	650/730	250/290
245/45ZR18	100XL	Y	243	677	710/800	250/290
245/50ZR18	104XL	Y	253	703	800/900	250/290
255/35ZR18	94XL	Y	260	635	600/670	250/290
255/40ZR18	99XL	Y	260	661	690/775	250/290
255/45ZR18	103XL	Y	255	687	775/875	250/290
255/50ZR18	106XL	W	265	713	850/950	250/290
255/55ZR18	109XL	W	265	737	925/1030	250/290
265/35ZR18	97XL	Y	271	643	650/730	250/290
265/40ZR18	101XL	Y	271	669	730/825	250/290
275/40ZR18	103XL	Y	278	677	775/875	250/290
275/45ZR18	107XL	Y	273	705	875/975	250/290
285/35ZR18	101XL	Y	290	675	730/825	250/290
295/35ZR18	103XL	Y	301	663	775/875	250/290
225/35ZR19	88XL	Y	230	641	500/560	250/290
225/40ZR19	93XL	Y	230	663	580/650	250/290
225/45ZR19	96XL	Y	225	685	630/710	250/290
225/55ZR19	103XL	W	233	731	775/875	250/290
235/35ZR19	91XL	Y	241	647	545/615	250/290
235/40ZR19	96XL	Y	241	671	630/710	250/290
235/45ZR19	99XL	Y	236	695	690/775	250/290
235/50ZR19	103XL	Y	245	719	775/875	250/290
235/55ZR19	105XL	W	245	741	825/925	250/290
245/35ZR19	93XL	Y	248	655	580/650	250/290
245/40ZR19	98XL	Y	248	679	670/750	250/290
245/45ZR19	102XL	Y	243	703	750/850	250/290
245/55ZR19	103	W	253	753	875/975	250/290
255/30ZR19	91	Y	260	637	615	250/290
255/35ZR19	96XL	Y	260	661	630/710	250/290
255/40ZR19	100XL	Y	260	687	710/800	250/290
255/45ZR19	104XL	Y	255	713	800/900	250/290
255/50ZR19	107XL	Y	265	739	875/975	250/290
255/55ZR19	111XL	W	265	763	975/1090	250/290
265/30ZR19	93XL	Y	271	643	580/650	250/290
265/35ZR19	98XL	Y	271	669	670/750	250/290
265/40ZR19	102XL	Y	271	695	750/850	250/290
265/50ZR19	110XL	Y	277	749	950/1060	250/290
275/30ZR19	96XL	Y	278	649	630/710	250/290
275/35ZR19	100XL	Y	278	675	710/800	250/290
275/40ZR19	105XL	Y	278	703	825/925	250/290
275/45ZR19	108XL	W	273	731	900/1000	250/290
275/50ZR19	112XL	Y	284	759	1000/1120	250/290
275/55ZR19	111	W	284	785	1090/1215	250/290
285/40ZR19	107XL	Y	290	711	875/975	250/290
285/45ZR19	111XL	Y	285	739	975/1090	250/290
295/30ZR19	100XL	Y	301	661	710/800	250/290
225/35ZR20	90XL	Y	230	666	600	250/290
235/45ZR20	100XL	Y	236	720	710/800	250/290
235/50ZR20	104XL	W	245	744	800/900	250/290

SIZE	LOAD INDEX	SPEED SYMBOL	SECTION WIDTH (mm)	OD (mm)	MAX.LOAD(KG)	MAX.PRESSURE(KPA)
235/55ZR20	105XL	W	245	766	850/925	250/290
245/35ZR20	95XL	Y	248	680	615/690	250/290
245/40ZR20	99XL	Y	248	704	690/775	250/290
245/45ZR20	103XL	Y	243	728	775/875	250/290
245/50ZR20	102	Y	253	754	850/925	250/290
255/35ZR20	97XL	Y	260	686	650/730	250/290
255/40ZR20	101XL	Y	260	712	730/825	250/290
255/45ZR20	105XL	Y	255	738	825/925	250/290
255/50ZR20	109XL	Y	265	764	925/1030	250/290
255/55ZR20	110XL	W	265	788	975/1060	250/290
265/35ZR20	99XL	Y	271	694	690/775	250/290
265/40ZR20	104XL	Y	271	720	800/900	250/290
265/45ZR20	108XL	Y	266	746	900/1000	250/290
265/50ZR20	111XL	W	277	774	975/1090	250/290
275/30ZR20	97XL	Y	278	674	650/730	250/290
275/35ZR20	102XL	Y	278	700	750/850	250/290
275/40ZR20	106XL	Y	278	728	850/950	250/290
275/45ZR20	110XL	Y	273	756	950/1060	250/290
275/50ZR20	113XL	Y	284	784	1030/1150	250/290
275/55ZR20	117XL	W	284	810	1150/1285	250/290
285/35ZR20	104XL	Y	290	708	800/900	250/290
285/40ZR20	108XL	Y	290	736	900/1000	250/290
285/45ZR20	112XL	Y	285	764	1000/1120	250/290
285/50ZR20	116XL	W	297	794	1120/1250	250/290
295/30ZR20	101XL	Y	301	686	730/825	250/290
295/35ZR20	105XL	Y	301	714	825/925	250/290
295/40ZR20	110XL	Y	301	744	950/1060	250/290
295/45ZR20	114XL	Y	296	774	1060/1180	250/290
305/40ZR20	112XL	Y	313	752	1120	250/290
315/35ZR20	110XL	Y	320	728	950/1060	250/290
245/35ZR21	96XL	Y	248	705	710	250/290
255/40ZR21	102XL	Y	260	737	850	250/290
255/45ZR21	106XL	Y	255	763	850/950	250/290
265/40ZR21	105XL	Y	271	745	825/925	250/290
265/45ZR21	108XL	Y	266	771	900/1000	250/290
275/35ZR21	103XL	Y	278	725	775/875	250/290
275/40ZR21	107XL	Y	278	753	975	250/290
275/45ZR21	110XL	Y	273	781	975/1060	250/290
275/50ZR21	113XL	W	284	809	1150	250/290
285/35ZR21	105XL	Y	290	733	825/925	250/290
285/40ZR21	109XL	Y	290	761	925/1030	250/290
285/45ZR21	113XL	Y	285	789	1030/1150	250/290
295/35ZR21	107XL	Y	301	739	875/975	250/290
295/40ZR21	111XL	Y	301	769	975/1090	250/290
315/30ZR21	105XL	Y	320	723	850/925	250/290
315/35ZR21	111XL	Y	320	753	1090	250/290
315/40ZR21	115XL	Y	320	785	1090/1215	250/290
325/30ZR21	108XL	Y	331	729	900/1000	250/290
325/40ZR21	116XL	Y	331	793	1150/1250	250/290
255/45ZR22	107XL	Y	255	789	975	250/290

SIZE	LOAD INDEX	SPEED SYMBOL	SECTION WIDTH (mm)	OD (mm)	MAX.LOAD(KG)	MAX.PRESSURE(KPA)
265/35ZR22	102XL	Y	271	745	750/850	250/290
265/40ZR22	106XL	Y	271	771	950	250/290
275/40ZR22	107XL	Y	278	779	975	250/290
275/45ZR22	112XL	Y	273	807	1000/1120	250/290
275/50ZR22	115XL	W	284	835	1090/1215	250/290
285/40ZR22	110XL	Y	290	787	950/1060	250/290
285/45ZR22	114XL	Y	285	815	1060/1180	250/290
295/40ZR22	112XL	Y	301	795	1000/1120	250/290
315/35ZR22	111XL	Y	320	779	1090	250/290
325/35ZR22	104XL	Y	331	787	1060/1180	250/290
325/40ZR22	114	Y	331	819	1180	250/290



YST-718

Pattern Design:

- ◆ Semi-closed Shoulder Design.
Reduce tire noise efficiently, and ensure the tire cornering performance and maneuverability.
- ◆ Four-main Ditches Design.
Reduce tire slippage efficiently, and improve the wet grip ability.
- ◆ Horizontal Pattern Groove and Steel Plate Depth Matching Design.
Match the stiffness design of each pattern strip efficiently and improve the mileage.
- ◆ Optimize the Design of Variable Pitch Arrangement.
By optimizing the tread pattern pitch design through computer simulation, the noise caused by tire pattern blocks hitting the ground is efficiently reduced, which makes the driver and passengers to experience a quiet and comfortable driving experience.
- ◆ Silicon-contained Tread Design.
The new silicon tread formula enhances grip on wet and the slippery roads while reducing rolling resistance for safer and more fuel saving driving.



Applicable vehicle type:  



SIZE	LI/SS	SECTION WIDTH(MM)	OD (MM)	MAX.LOAD (KG/LBS)	MAX.PRESSURE (KPA/PSI)
175/70R12	80T	177	551	450/992	300/44
165/70R13	79T	170	562	437/963	300/44
165/70R13	83TXL	170	562	487/1074	340/50
175/70R13	82T	177	576	475/1047	300/44
185/70R13	86T	189	590	530/1168	300/44
185/65R14	86H	189	596	530/1168	300/44
185/70R14	88T	189	616	560/1235	300/44
195/65R14	89H	201	610	580/1278	300/44
205/70R14	95H	209	644	690/1521	300/44
195/60R15	88H	201	615	560/1235	300/44
195/65R15	95TXL	201	635	690/1521	340/50
195/65R15	91H	201	635	615/1356	300/44
205/65R15	94H	209	647	670/1477	300/44





YUSTA

YM-3

Pattern Design:

◆ Large horizontal pattern

The huge horizontal pattern blocks connect in all directions which provide better mud discharge performance, as well as enormous climbing ability.

◆ Polygonal pattern block design

It provides sufficient lateral grip when turning fast, which can significantly reduce the sliding caused by turning or braking when passing through gravel roads quickly.

◆ Open-shoulder side pattern

It significantly improves the protective performance of the tire shoulder, increases the tire ground contact area under low air pressure, and can be combined with the tread pattern to quickly throw mud out of the groove.

◆ Skid-resistant design

It ensures that the inner side of the tire is designed with a large number of grooves, which have better skid resistance and excellent wetland performance.



Braking
Performance



Off-road
Performance



Wetland
Performance



Durable
wear

Applicable vehicle type:  



SIZE	LI/SS	PR	SECTION WIDTH(MM)	OD (MM)	MAX.LOAD (KG/LBS)	MAX.PRESSURE (KPA/PSI)
31×10.50R15LT	109Q	6PR	268	775	1030/2270	350/51
32×11.50R15LT	113Q	6PR	290	801	1150/2535	350/51
33×12.50R15LT	108Q	6PR	318	826	1000/2205	250/35
35×12.50R15LT	113Q	6PR	318	877	1150/2535	250/35
37×12.50R16.5LT	134N	10PR	318	928	2120/4675	450/65
33×12.50R17LT	114Q	8PR	318	826	1180/2600	350/51
35×12.50R17LT	121Q	10PR	318	877	1450/3195	450/65
37×12.50R17LT	124Q	8PR	318	928	1600/3525	350/51
33×12.50R18LT	118Q	10PR	318	826	1320/2910	450/65
35×12.50R18LT	123Q	10PR	318	877	1550/3415	450/65
37×13.50R18LT	128Q	10PR	345	928	1800/3970	450/65
33×12.50R20LT	114Q	10PR	318	826	1180/2600	450/65
35×12.50R20LT	121Q	10PR	318	877	1450/3195	450/65
35×13.50R20LT	121Q	10PR	345	877	1450/3195	450/65
37×13.50R20LT	127Q	10PR	345	928	1750/3860	450/65
38×15.50R20LT	125Q	8PR	395	953	1650/3640	350/51
33×12.50R22LT	109Q	10PR	318	826	1030/2270	450/65
35×12.50R22LT	117Q	10PR	318	877	1285/2835	450/65
37×13.50R22LT	123Q	10PR	345	928	1550/3415	450/65
33×12.50R24LT	104Q	10PR	320	826	900/1985	450/65
35×12.50R24LT	113Q	10PR	316	877	1150/2535	450/65
33×13.50R24LT	109Q	12PR	345	832	1030/2270	550/80
35×13.50R24LT	118Q	12PR	341	877	1320/2910	550/80
37×13.50R24LT	120Q	10PR	345	928	1400/3085	450/65
33×14.50R24LT	110Q	12PR	367	832	1060/2335	550/80
33×13.50R26LT	107Q	10PR	350	832	975/2150	450/65
35×13.50R26LT	118Q	10PR	341	877	1320/2910	450/65
37×13.50R26LT	117Q	10PR	345	928	1285/2835	450/65

